




WELL TESTING TOOLS

- SLICK-LINE UNITS
- MOBILE TESTING UNITS
- SOFTWARE
- INSPECTION AND CALIBRATION TOOLS FOR EQUIPMENT TESTING
- DOWNHOLE GAUGE SYSTEMS


WIRELESS DYNAMOMETER

SIDDOS-mini 2

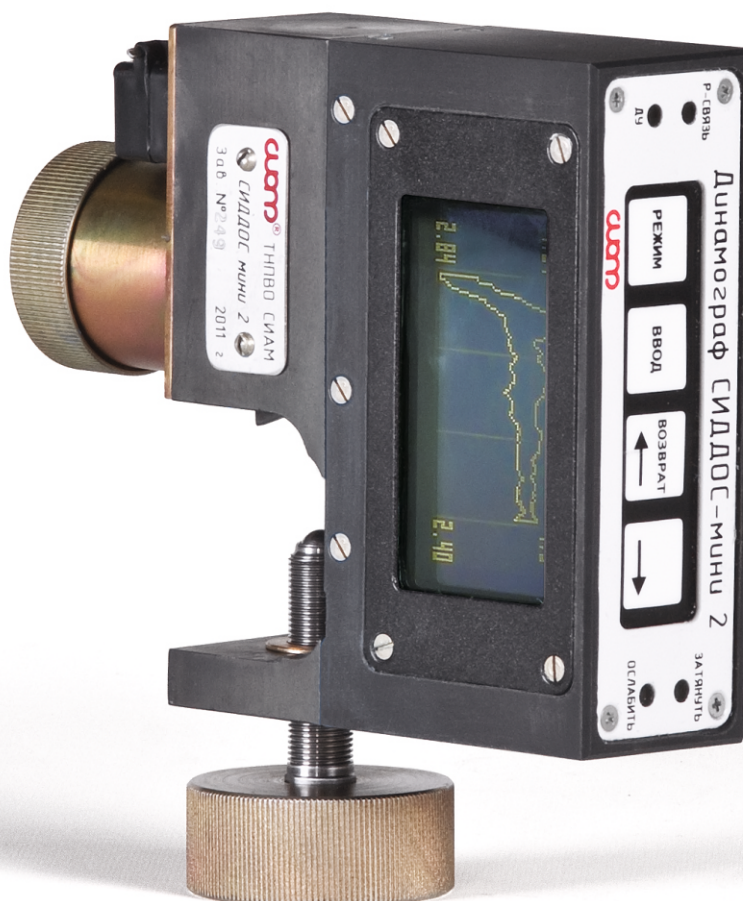

WELL TESTING TOOLS

Wireless dynamometer SIDDOS-mini 2

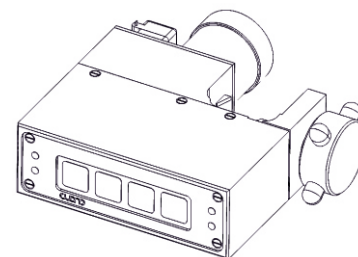

Prompt and easy control over sucker-rod pump operation

Functions

- Maximum versatility in field operations due to easy polished rod set up.
- Prompt sucker-rod pump evaluation and estimation of the test quality due to built-in visualization and test analysis software.

Features

- The smallest and lightest dynamometer with integrated visualization.
- Single-block unit, wireless connection to PC.
- Temperature ranges from $-40\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ (-40F to $+122\text{F}$).
- Remote control of the tool.
- Shock and vibration resistant body for reliable operation.

Specifications

Load measuring range	0-15 000 kgf
Position measuring range	500-9999 mm
Load and position control method	indirect
Diameter of the polished rod	16-39 mm
Beam rate	from 0,4* to 15 spm
Load resolution	10 kgf
Memory capacity	up to 400 dynamograms
Battery operating ON-time	10 hours
Operating temperature range	from $-40\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$
Dimensions	145x145x65 mm
Weight	0,8 kg
Data transfer interface	RS-232 (COM-port) or USB

* — when stroke length entered manually

WAM[®]
SIAM COMPANY

WELL TESTING
TOOLS

MOBILE
TESTING
UNITS

SLICK-LINE
UNITS

DOWNHOLE
GAUGE
SYSTEMS

INSPECTION AND
CALIBRATION TOOLS
FOR EQUIPMENT
TESTING

SOFTWARE

TNPVO «SIAM»
3 Belaya Street
Tomsk 634003,
The Russian Federation
tel +7(3822) 65 38 80
tel +7 (3822) 90 00 08
fax +7(3822) 65 97 97

tnpvo@integra.ru
www.siamoil.ru

